

# Panchromatic

## Service & Installation Centre

The Place to find Antique, Vintage, Retro or just plain used, 8 mm Super 8 mm 9.5 mm, 16 mm Film Projectors, Slide Transparency Projectors in Various Formats and also a selection of Camera & Darkroom Equipment. Serviced, Refurbished & Reconditioned

### BOLEX M-8R 8 mm Film Projector

Serial Number 440738 (1958)

Fully Tested & Working

Classic 8 mm projector, cosmetic condition is Excellent, optical & electronic condition is Excellent. Fully serviced, tested and working. The Bolex M-8R projector was designed to run off a mains power supply higher than 125 Volts. It was also suggested as the model for those who intended to travel with their projector, as it contained a voltage divider with built-in resistance and could run off all mains supplies from 110 to 250 Volts.

In excellent condition throughout, this projector was displayed at an exhibition held at the Stoke on Trent City Museum and Art Gallery May 9<sup>th</sup> to July 12<sup>th</sup> 1992

- Overall Dimensions: 13" x 6" x 12" (arm retracted, without reels)
- Weight: 12 lbs. (17 1/2 lbs. with carrying case and accessories).
- Construction: Cast aluminum and steel. Painted with olive enamel finish on early models; Grey/silver finish on later models.
- Reel Capacity: Reel arms accommodate 400 ft. reels. Upper reel arm folds downward and locks for storage; Serves as a carrying handle.
- Threading: Rapid snap threading attaches film to sprockets; Lens assembly pivots outward for easy loading and unloading. Automatic loop former maintains the bottom loop even on damaged film.
- Power: Voltage divider with built-in resistance, runs projector on 110-250v, 50-60 cycle AC or DC power supplies
- Lamp: 110v 500 watt pre-focus bulb. Modern replacement: CZX bulb.
- Lens: Interchangeable lenses; usually supplied with a Kern 20mm f/1.6. Later models were supplied with a Kern 20mm f/1.3 lens.

## Panchromatic

- Variable Speed: 16 frames per second; adjustable for slower or faster speed. Motor or manual rewind. An audible warning device signals if the projection rate drops below safe limit.

### Other Features

Direct drive motor operates the take-up reel

Forced draft ventilation and cooling

Framing knob adjusts the claw for vertical alignment in the gate

Front legs can be adjusted individually for height

An outlet on the rear of the projector can be used for plugging in a table lamp

Lamp housing door allows easy access to the projection lamp.

### Notes:

**Unit has been serviced and tested with new belts fitted and is despatched as working in Hard Carry Case**

**Unless stated otherwise this unit is dispatched with working lamp you have not been charged for. However, as this lamp is used and as fitted, we cannot warranty any remaining lamp life. Comes with Paillard 400ft reel in tin, power lead and user manual**

Delivery to Mainland UK is at  
Standard Insured Courier Delivery Price up to 32 Kilos for Multiple Items

[www.Panchromatic.co.uk](http://www.Panchromatic.co.uk)



Sales@Panchromatic.co.uk

Panchromatic




Sales@Panchromatic.co.uk

Panchromatic



[Sales@Panchromatic.co.uk](mailto:Sales@Panchromatic.co.uk)

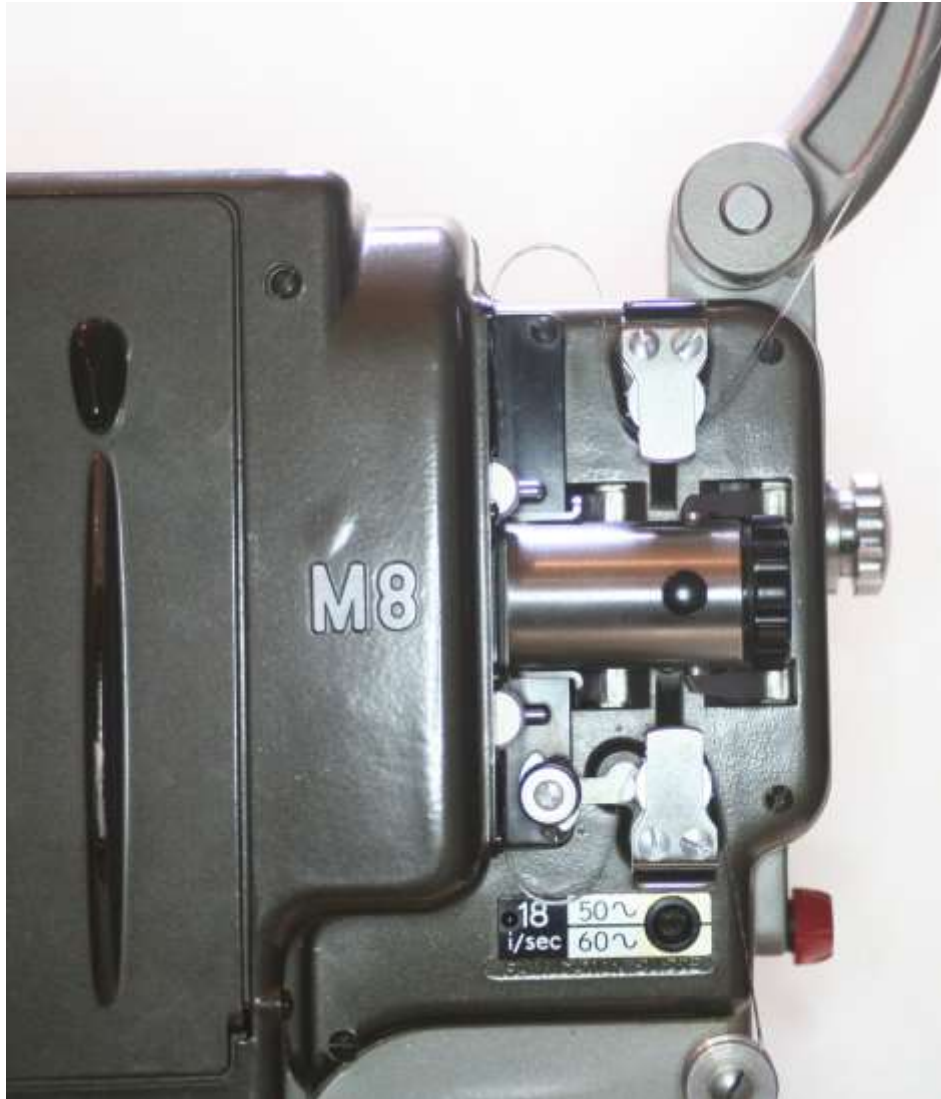



Panchromatic



Sales@Panchromatic.co.uk





Panchromatic



[www.Panchromatic.co.uk](http://www.Panchromatic.co.uk)

[Sales@Panchromatic.co.uk](mailto:Sales@Panchromatic.co.uk)